

PASCO

eco-block

The insulated building block of the future

*The PASCO solution for a
monolithic wall construction*



- ✓ Cost efficient
- ✓ Eco - friendly
- ✓ Load bearing
- ✓ Recyclable
- ✓ Resistant to fire
- ✓ High insulation value
- ✓ Superb sound protection
- ✓ Low consumption of mortar
- ✓ Edge- and corner stones available




www.pasco.ae






the *eco-block* from PASCO

Laying Details

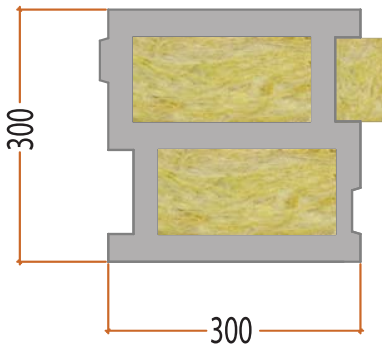

Normal Block

Edge Block

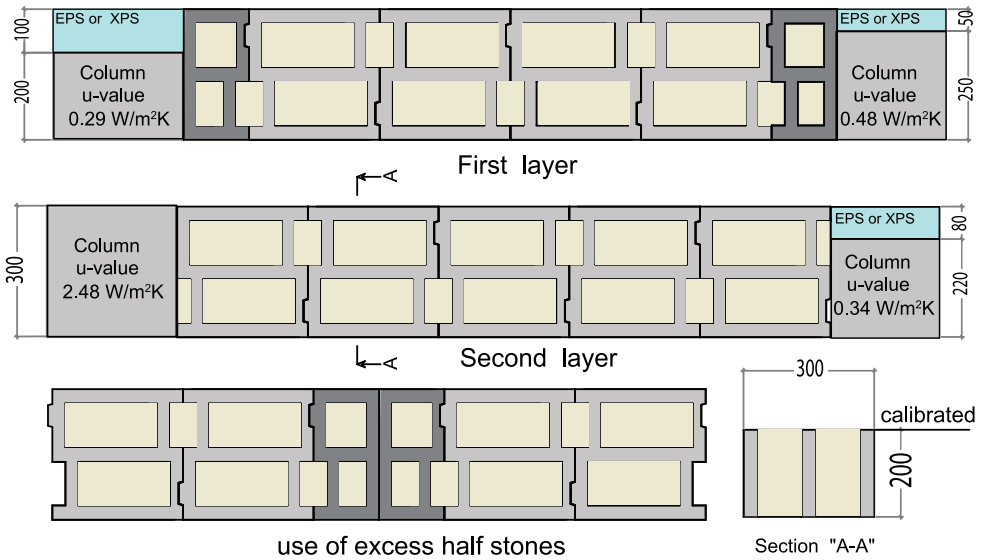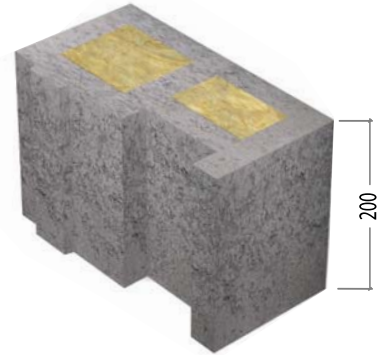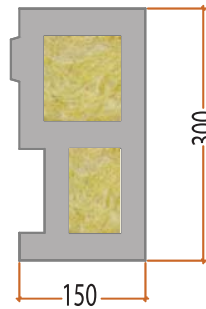

Pasco Rating System	Super <i>eco-block</i>	Standard <i>eco-block</i>	Export <i>eco block</i>	Dim.
Weight per Block , approx.	10	14	20	kg
Wall thickness	30	30	30	cm
Length / Height (plan calibrated)	30/20	30/20	30/20	cm
Strength (load bearing)	4.5	7	12	N/mm ²
Thermal conductivity	$\lambda = 0.10$	$\lambda = 0.19$	$\lambda = 0.37$	W/m K
Heat transmission coefficient, u-value*	0.32	0.57	0.99	W/m ² K
<i>eco-block</i> Nos per m ² wall	16.6	16.6	16.6	nos
<i>eco-block</i> per bundle	72	72	84	nos
Pallets per trailer	36	36	18	nos
Nos of <i>eco-block</i> per trailer	2592	2592	1512	nos
Weight per trailer	25.9	36.3	33.3	ton
Price (ex factory)				Dh/pc

*inclusive plaster




the *eco-block* from PASCO

.....*pleasant indoor climate*

at any season

summer cool - winter warm

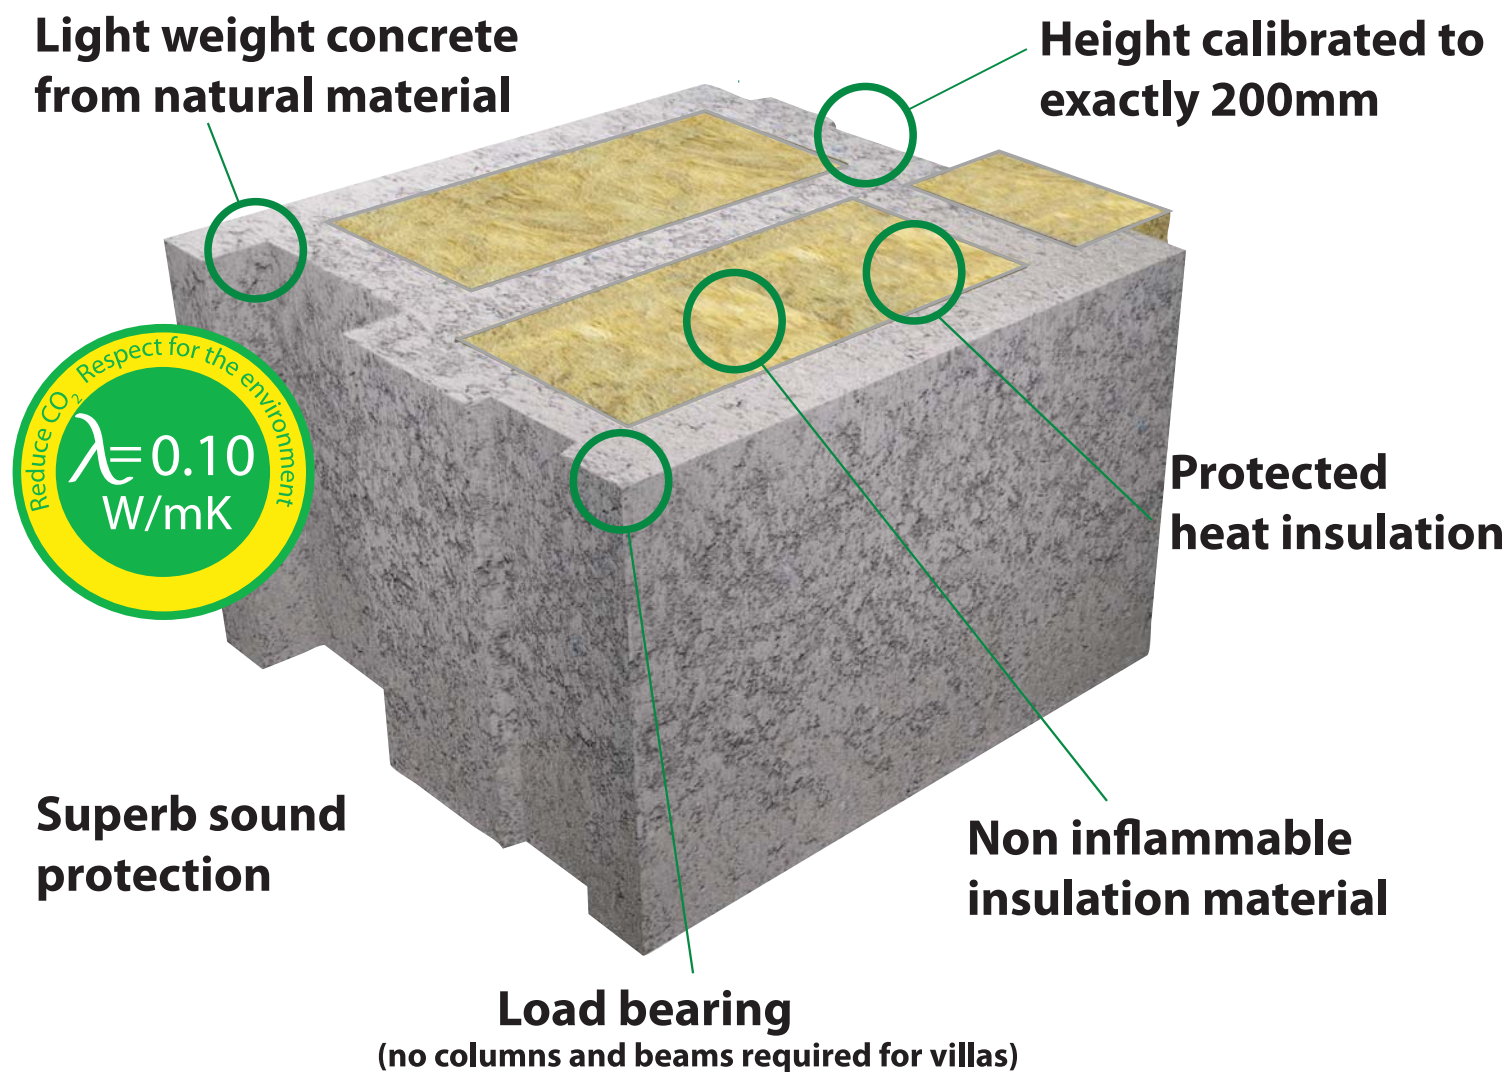

Notice: None of the content of this catalogue- whether it be text or graphic image - may be mirrored, reproduced or displayed in whole or in part in any publication or widespread circulation without prior permission obtained from us in writing. Information may be changed or updated without notice.



the *eco-block* from PASCO

Save energy, help the environment and take additional advantages :

- *Fire resistant*
- *Superior acoustics*
- *Load bearing*
- *Edge and corner stones*
- *Sustainable and recyclable*
- *Easy fixing*

